

SPR 200

SIMAG

190 kg Self-contained Ice Machine

Complete range: SPR 80 - SPR 120 - SPR 200

Technical features

- Electronic control
- Stainless steel bodywork - scotch brite
- Air or water cooled
- Direct transmission
- Easily accessible components
- Low power and water consumption
- Reduced dimensions
- Continuous production



Internal bin capacity




55 kg of ice
cubes

Type of ice

Flake ice



Residual water content 25%



Voltage

230/50/1 Standard version

220-240/60/1 Available on demand

Machine dimensions

Net size WxDxH 920 x 594 x 867 mm

Net weight 73 kg

Shipping size WxDxH 0 x 0 x 0 mm

Shipping weight 82 kg

Technology and Certifications



MILANO OFFICE
Sales Dept.
Tel. +39 02 93900215
e-mail: sales@simag.it
Service Dept.
Tel. +39 02 93960357
e-mail: service@simag.it

SIMAG FAR EAST
Singapore Office
Tel. ++65 6738 5393
e-mail: scotsman@scotsman.com.sg


www.simag.it

SPR 200

SIMAG

190 kg Self-contained Ice Machine

Complete range: SPR 80 - SPR 120 - SPR 200

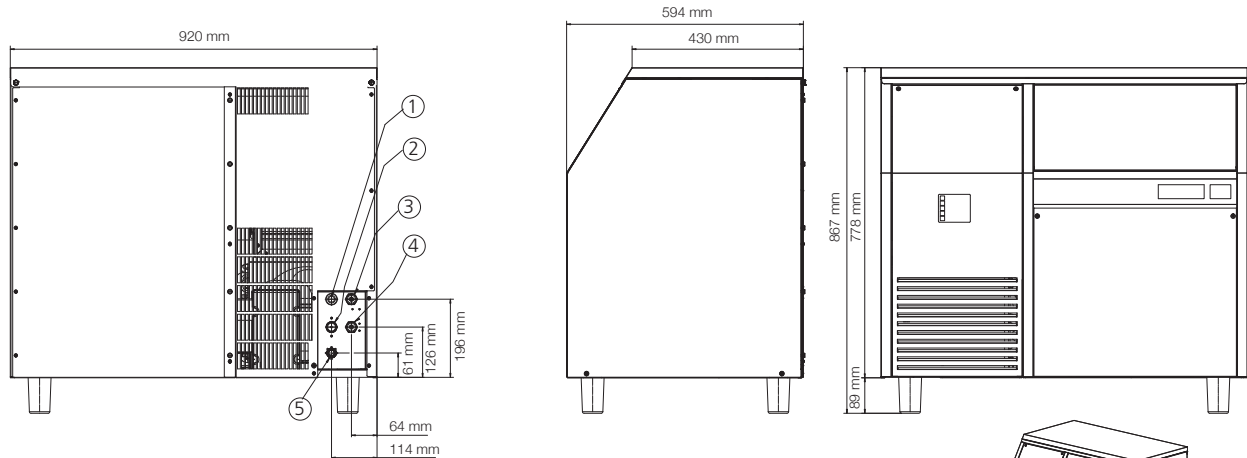

UNIT OF MEASUREMENT: mm

1. CORD SET
2. 3/4" GAS WATER INLET
3. 3/4" GAS WATER INLET
WATER COOLED ONLY
4. 3/4" GAS WATER OUTLET
WATER COOLED ONLY
5. Ø 20mm WATER OUTLET
BIN WATER OUTLET

DRAINAGE PER GRAVITY

Operating Limits

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production kg	Power input Watt (*)	Refrigerant		Fuse A	Consumptions		
		10°C/10°C		Type	Charge kg		kWh/100kg	kWh/24h	Water l/h (**)
SPR 200 A	230/50/1	190	820	R452A	0.75	10	12,6	18,2	6.0
SPR 200 W	230/50/1	200	680	R452A	0.59	10	9,1	16	240.0
SPR 200 A	220/60/1	200	n.a.	R404A	n.a.	10	n.a.	n.a.	6.5
SPR 200 W	220/60/1	200	n.a.	R404A	n.a.	10	n.a.	n.a.	108.3

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water